

City of San Mateo Parklet Program Guidelines



**As Adopted by City Council
June 21, 2021**

Parklet Program Guidelines

I. Introduction

The City of San Mateo has developed a Parklet Program that allows for parklet installations in most commercial areas of the City after the end of the Temporary Outdoor Dining Program (which expires on December 31, 2021).

These Parklet Program Guidelines outline the requirements for parklet installations. Due to the unique circumstances of each proposed parklet location, these are guidelines and specific elements may not be required in all cases. Similarly, there may be instances where City staff requires additional design elements not covered in these guidelines. The City of San Mateo will review the parklet permit applications and will only approve parklets that are able to meet the design requirements and are determined by staff to meet traffic safety standards as established by the Municipal Code and the MUTCD guidelines.

All parklet installations, including those previously installed under the Temporary Outdoor Dining Program, will require a [Parklet Encroachment Permit](#) from the City of San Mateo as of January 1, 2022. Plans must be submitted by the business sponsor and permits must be issued by the City prior to any construction or modifications occurring. The parklets will be subject to both a one-time permit application fee as well as an annual permit fee as defined in the [City Fee Schedule](#).

II. Location and Setback Criteria

Parklets are generally allowed in commercial districts along the curbside on public streets where on-street parking spaces exist. However, parklets are not allowed along El Camino Real because it is a State-controlled roadway and is not under the City's jurisdiction.

Parklets can be considered in commercial districts where there are or would be space(s) for on-street parallel, angled, or perpendicular parking, including spaces with metered or unmetered parking. Parklets are not allowed in ADA/handicap parking spaces or red curb zones. Parklets proposed in loading zones and in 24-minute parking spaces will be considered on a case by case basis.

A. Location Criteria


- **Adjacency to Storefront** - Parklets may only be installed along the frontage of the storefront that is applying for the parklet. Parklets are not allowed to use the frontage of adjacent storefronts to expand their territory. However, minor encroachments on adjacent storefront frontages may be allowed depending on the dimensions of the parking stalls being used for the parklet installation. Parklets shared with adjacent businesses will be considered on a case-by-case basis. The shared parklet area cannot exceed the frontage for the combined businesses.
- **Maximum Parking Stalls** - A maximum of two parallel parking spaces or four perpendicular or angled parking spaces shall be used for each parklet.
- **Parallel parking spaces** - Parklets located in parallel parking spaces can be the length of one or two parallel parking spaces. A 4-foot inner buffer is required when adjacent to another parallel parking space. A 2-foot buffer is required when adjacent to a driveway, motorcycle parking, or a bicycle corral.

Parklet Program Guidelines


- **Perpendicular and angled parking spaces** - Parklets located in perpendicular or angled parking spaces can utilize a maximum of two to four combined parking spaces. The edge of the parklet must be set back 4 – feet from the adjacent parking space on either side.
- **Corner locations** - Parklets located adjacent to intersection crosswalks shall provide 20-foot setbacks for non-signalized intersections and 30-foot setbacks from signalized intersections. Parklets that cannot meet these setback requirements may be considered on a case by case basis based on whether sight distance and safety can be maintained. In addition, storefronts located at corner locations may only have one parklet.
- **Fronting driveways** - Parklets may be installed in front of a driveway if the applicant owns the property served by the driveway or obtains written permission from the property owner. If the driveway has been abandoned or no longer provides access to off-street parking, the driveway may be levelled as part of the conditions for the parklet project. Parklets may not obstruct driveways or entrances to City-owned parking facilities.

B. Parklet Setbacks

- **Travel Lane Setback** – Parklets shall have a 2-foot minimum setback from the travel lane measured from the parking striping adjacent to the travel lane (see Design and Parklet Placement diagrams below for more information).
- **Side Setback** - Parklets shall have a 4-foot minimum side setback to the nearest parking space (see Design and Parklet Placement diagrams below for more information).

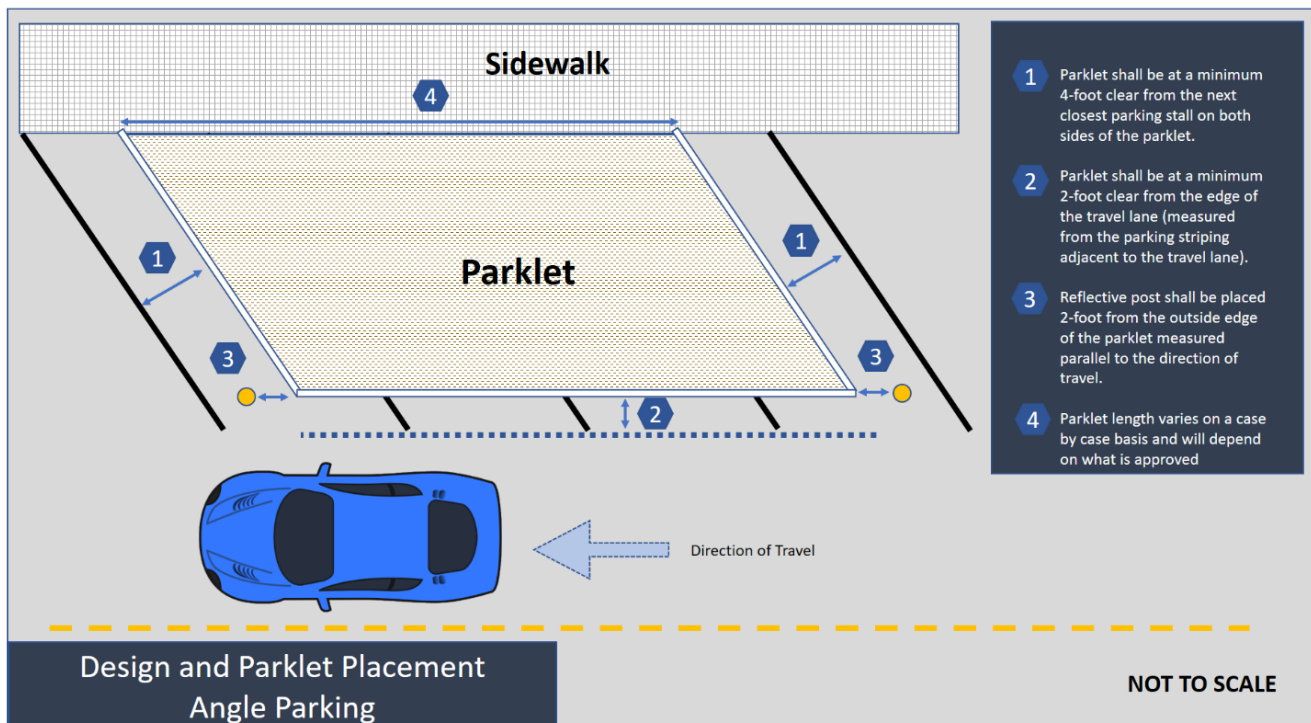

Parklet Program Guidelines

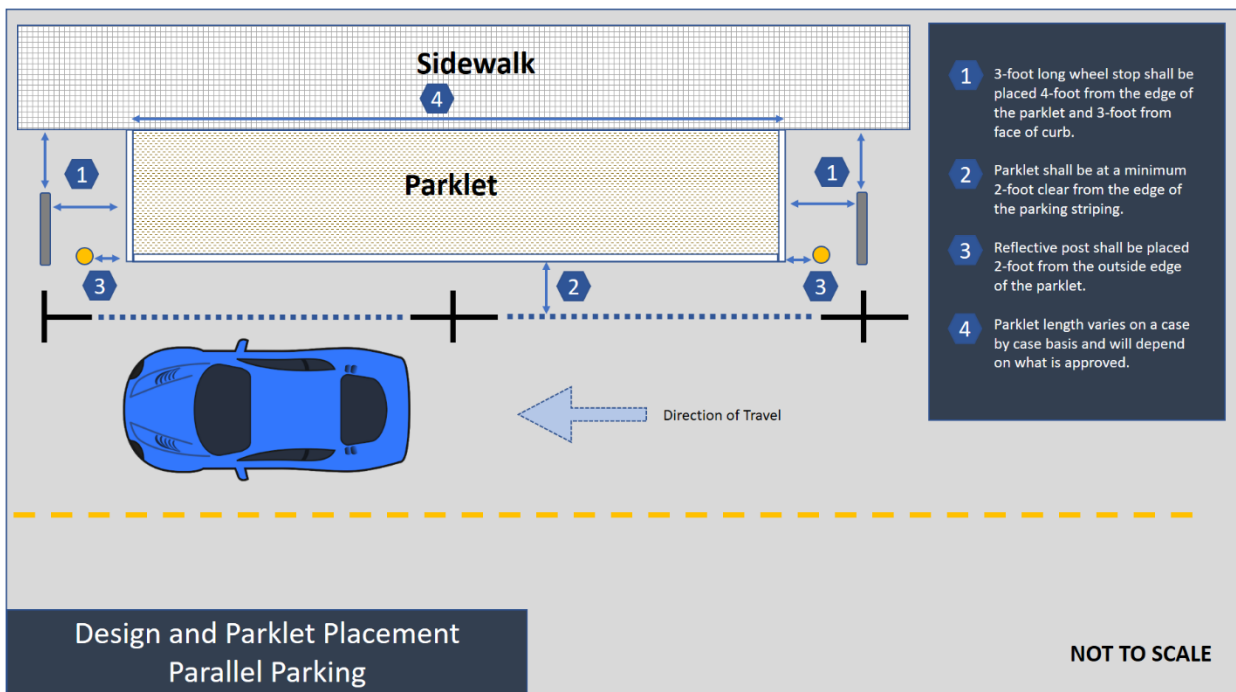

C. Other Location Criteria

- **Utilities** - Parklets may not be constructed over or obstruct utility access panels, manhole covers, storm drains, or fire hydrants. A minimum clearance of 8 feet from storm drains and manhole covers will be required to allow for maintenance access. Parklets proposed under overhead utility lines will be required to meet the minimum distance requirements as established by the CPUC. Parklets that block the outlet of a sidewalk underdrain will be required to ensure the outlet is functional and flowing. Be sure to take a thorough inventory of utility access covers in your proposed parklet area by checking under parked cars. Parklet sponsors must provide for access to any City or public utility company that may have underground conduits beneath the constructed parklet. Access to utilities may require that a parklet sponsor temporarily remove all or a portion of the constructed parklet. Parklet sponsors are responsible for the cost of re-installing and restoring any damage to the parklet.
- **Bike Lanes** – Parklets cannot obstruct a bicycle lane or path.
- **Parklet Width** – Parklets must stay within the designated parking stall area.
- **Fire Hydrants** - Fire Hydrants shall not be blocked. Clearance of 15-foot around the hydrant (7 ½ foot each side) shall be maintained.
- **Fire Department Connections (FDCs)** – To maintain access to FDCs, 5-foot wide openings should be provided between every 2 adjacent parklets (and no more than 75-feet apart).

Parklet Program Guidelines

III. Parklet Design Elements


Parklets generally consist of the following key elements:

- A) **Platform** that allows the parklet to serve as an extension of the sidewalks.
- B) **Railings or enclosures** that demarcate the exterior of the parklet from the street and surrounding parking spaces.
- C) **Traffic safety protections** to reduce the potential for auto-related damage.
- D) **Furnishings and fixtures**.

A. Platform Design Criteria


- **Materials** - Platforms must be constructed from durable materials that can withstand wear and tear of elements. Pouring concrete for parklet platforms is not allowed. You may use concrete pavers on a platform structure instead. Surface materials must be textured or treated with a non-skid coating to ensure a safe walking surface. Loose particles, such as sand or loose stone, are not permitted.
- **Maintenance access** - Parklets must be designed to provide access under the platform to allow for maintenance (i.e. repairs or clearing debris). If the platform base is not a solid mass, access can be provided through access panels, removable pavers, or other means.
- **Platform Threshold** - The platform threshold must be flush and even with sidewalk and must not leave a gap greater than 1/2 inch, nor a vertical separation greater than 1/4 inch.
- **Drainage** - Platforms should allow for curbside drainage flow. A 6-inch height by 12-inch width minimum clear gutter space must be provided along the entire length of the proposed platform. Openings at either end of the parklet may be covered with screens to prevent debris buildup beneath the platform and in the gutter. It is the responsibility of the parklet permittee to clean the cover or screen to prevent any backup of storm water. All parklets must provide access through the parklet platform or threshold to the gutter adjacent to the curb.
- **Bolting Not Allowed** - At no time may structures be bolted or affixed in any way to the roadway or any structure (including but not limited to: buildings, fire hydrants, street trees, streetlight, parking meters, or traffic poles, etc.). An exception to this is that wheel stops for traffic protection must be bolted to the roadway as described in the Traffic Protection section of these Guidelines.

Parklet Program Guidelines

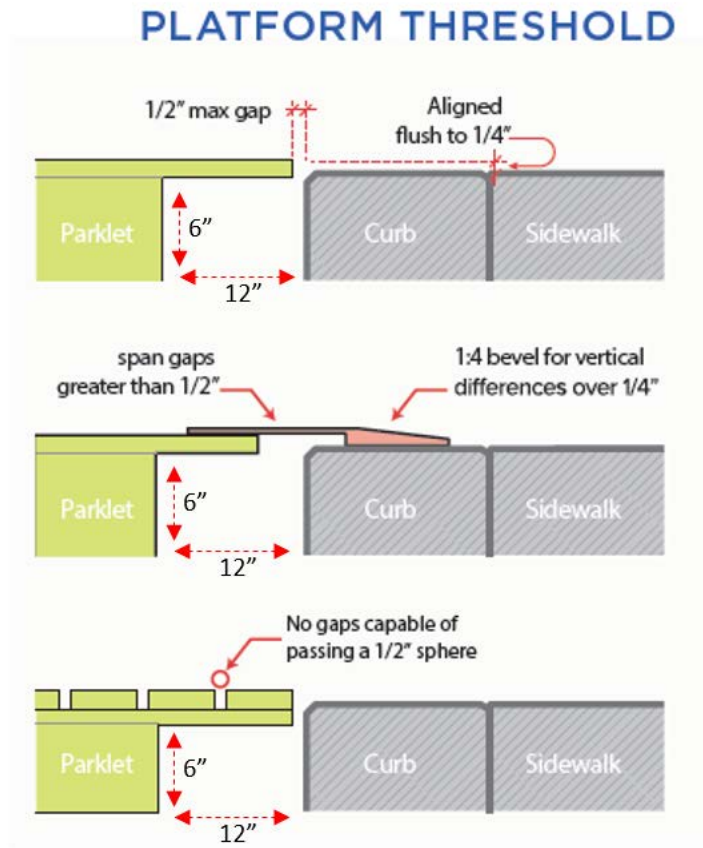

Source: San Francisco Parklet Manual

- **Sub-structure** - Designs for the sub-structure of a parklet vary and depend on the slope of the street and overall design for the structure. The sub-structure must accommodate the crown of the road and provide a level surface for the parklet. "Bison pedestals" (pictured below) spaced under the surface and of different heights are a common application. Another method is to provide steel sub-structure and angled beams.

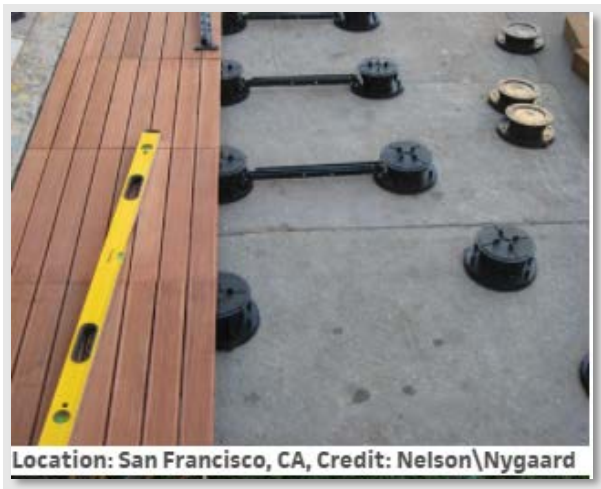

Parklet Program Guidelines

- **ADA Accessibility** - All accessibility elements of the proposed platform shall be designed, constructed and/or conform to the applicable provisions, rules, regulations and guidelines of the California Building Code and Americans with Disabilities Act.
 - Accessible Platform Surface: The portion of the parklet platform connected by the accessible path of travel to the wheelchair turning space and wheelchair resting space must be level. The accessible platform surface maximum cross slope (perpendicular to the sidewalk or curb) and running slope (parallel to the curb) cannot exceed 2%.
 - Accessible entry: Shall be a minimum of 48 inches wide.
 - Accessible path of travel: It must connect the sidewalk to the accessible entry, platform surface, wheelchair turning space and wheelchair resting space.
 - Wheelchair turning space: Shall be 60 inches in diameter and located entirely within the platform; a 12-inch maximum overlap on the curb and sidewalk is acceptable.
 - Wheelchair landing: A 30- by 48-inch clear floor area. It's permitted to overlap with the Wheelchair Turning Space by 24 inches maximum in any orientation.

B. Parklet Railings/Enclosures

The parklet railing/enclosure marks the boundary between the parklet and the street or sidewalk. It should serve as a safe edge while also being visually appealing, permeable, and inviting. The following standards and guidelines should inform your design.

- Stable and sturdy enough not to fall over or be pushed over (must withstand 250-lbs of force).
- Edge Buffers: the parklet should have an edge as a buffer from the street. This can take the form of planters, railing, cabling, or some other appropriate enclosure.
- Openings in rails must prevent passage of 4-inch sphere.
- Height: The height should not exceed 36 inches from the parklet platform floor to the top of the railing. If you wish to install wind barriers taller than 36 inches, the use of transparent materials like acrylic, plexiglass, plastic films, etc. is required. If transparent materials are used, the height of the railing, including the transparent materials, should not extend more than 6 feet from the floor platform.
- Visibility: The enclosure should not block the view of conflicting movements of traffic, including pedestrian traffic, nor block the view of traffic control devices such as traffic signs, traffic signals, and other traffic warning devices.
- All railings/enclosures must have retro-reflective reflectors or retro-reflective tape on the corners of the parklet facing the travel lane such that they are visible by vehicle traffic at night.
- Roofs, trellises, and tent shade structures will not be allowed after December 21, 2021. Any parklet that currently has these in place will need to remove them after this date.

Parklet Program Guidelines

C. Traffic Protections

The water-filled barricades that are currently serving as traffic protection will be removed after December 31, 2021 and parklets will be required to provide the traffic protections outlined in this section of the guidelines.

- **Wheel Stops** -- To help protect against moving traffic and parking cars, parklets in parallel parking spaces must be buffered using a wheel stop at a distance of 4-foot from the parklet and 3-foot from the face of curb (see Design and Parklet Placement diagrams on Page 3 and 4 for additional detail). This buffer may also serve as a space for adjacent property owners to accommodate curbside trash collection. Parklets located in angled and perpendicular parking spaces do not require a wheel stop unless otherwise specified during the application review process. Applicants are required to repair any damages to the roadway caused by the installation of the parklet or wheel stops if later removed. Any repairs shall be performed under a separate encroachment permit and in accordance with applicable City standards for roadway construction.

Wheel stops may be purchased from any vendor but must meet these specifications:

- 3 feet long
 - Black rubber with yellow stripes
 - Mounted with bolts
 - Installed 4 feet from outside ends of Parklet which occupies parallel parking spaces
 - Installed 3 feet from the curb
- **Posts or Bollards** -- Parklets shall have vertical elements that make them visible to traffic, such as flexible posts or bollards both with retroreflective tape. One possible measure are safe hits posts (as shown in the picture below). These vertical elements shall be placed 2 feet from the edge of the parklet on both sides of the parklet not adjacent to the travel lane. Structural bollards may be required if deemed necessary by the City.
- **Travel Lane Clearance** -- Parklets shall provide a minimum 2-foot clearance from the edge of the travel lane (measured from the parking striping adjacent to the travel lane) to ensure safe separation from traffic.



Parklet Program Guidelines

D. Furnishings and Fixtures

All furnishings and fixtures must be designed to be weighted down for wind protection. Items may need to be stored inside the business during periods of high winds. Please ensure that the weights used do not create tripping hazards for pedestrians.

- **Portable Heaters** –Space heaters are permitted if they are an outdoor approved type, are located in accordance with the manufacturer's recommendations, and are located at least 2 feet from the edge of any umbrella canvas, any foliage, or any other flammable object or material. Heaters are not allowed under umbrellas but can be placed near them if clearances are maintained.
- **Umbrellas** - Umbrellas shall be fire-retardant, pressure-treated or manufactured of fire-resistant material. No portion of an umbrella shall be less than eighty (80) inches above the parklet platform.
- **Electrical connections** – All wiring and electrical cords must be exterior rated, GFCI protected, and UL listed. Cords must not create tripping hazards on the sidewalk. If the cords cross above the sidewalk, they must provide a minimum clearance of 10 feet above the sidewalk and the platform of the parklet. The use of adapters is prohibited. Businesses are not allowed to tap into existing City electrical connections such as twinkle light outlets or streetlight poles. Generators are not allowed in association with parklets.
- **Lighting** – Lighting is encouraged and may be provided through electrical connections to the building. Solar powered lighting is strongly encouraged. Lighting shall not be directed towards the roadway to unintentionally cause glare for vehicles. Light strings must be hung to allow for a minimum clearance of 10 feet above the sidewalk and the platform of the parklet.
- **Signage** – Signs are allowed provided the sign area does not exceed 6 square feet (24 inches by 36 inches). Illuminated signage is not allowed. Sign copy is limited to business identification, except that if the parklet is meant to serve the general public, signage should reflect such. If the parklet is meant to serve as restaurant seating, signage should correlate in design with the signage on the primary building.

IV. Operational Standards

- **Private Control** – Parklets will be considered private space under the control of the permit holder. The permit holder is responsible for securing the parklet and any fixtures and furnishings contained within it during hours when the associated business is not in operation.
- **No Outdoor Food Preparation** – Outdoor food preparation is not permitted. No heating, cooking or open flames are permitted in a parklet. Hotpots, barbecues or other heating of food in the public right of way is not allowed.
- **No Open Flames** - Candles and open flames are not allowed on the parklets.
- **Alcohol Service** – Restaurants and food establishments licensed by the State of California will be permitted to sell and allow on-premise consumption of alcoholic beverages. Alcohol service is only allowed under full-service conditions and alcoholic beverages consumed in parklets are not

Parklet Program Guidelines

allowed to be provided in to-go containers. Establishments that serve alcoholic beverages in the parklet area shall be required to meet all requirements of the Alcoholic Beverage Control Board and any other federal, state, or local laws and regulations governing the sale and consumption of alcoholic beverages.

- **Site Maintenance** – Parklets shall be maintained free of litter, refuse and debris. The area shall be scrubbed and mopped to remove any food or drink stains on a daily basis by the permittee. Such cleaning shall be in accordance with the City’s [Storm Water Management and Discharge Control Program](#), which prohibits any discharge other than rain water into the storm water drainage system.
- **ADA Compliance** – Parklet seating areas must comply with all requirements of the Americans with Disabilities Act (ADA) and provide sufficient clearance and walkway space to allow safe access and egress.
- **Hours of Operation** – The parklet shall adhere to the same approved hours of operation as the associated business.
- **Safety Inspections** – The City will be making periodic safety inspections and reserves the right to require adjustments or removal of any elements, if deemed unsafe.

V. Permit Requirements

A. Permit Submittal Requirements

A [Parklet Encroachment Permit](#) is required for all parklet installations, including those that were in place prior to September 30, 2021. Permit applications must be submitted prior to the construction of any new parklet or the modification of any parklet permitted under the Temporary Outdoor Dining program.

The following submittals are required:

- Plan sets are required. It is recommended that plans are prepared by a design professional, such as an architect or engineer. The submitted plans should show the proposed layout of the parklet including:
 - The parklet location (site address, parking space number, etc.)
 - Dimensions of the parklet structure including platform, railings, stormwater access, etc.
 - Traffic protection measures and setbacks from adjacent parking spaces
 - Location of any adjacent utilities including curb drains, manhole covers, water shut-off valves, sidewalk utility boxes, streetlight poles, parking meters, etc.
 - Plans must demonstrate ADA accessibility and show dimensions of required clearances
- Materials palette – Use color photo samples to demonstrate:
 - Materials and plants to be used on platform
 - Railing materials
 - Platform materials

Parklet Program Guidelines

- A valid City of San Mateo Business License
- Evidence of current insurance coverage including a Certificate of Liability Insurance and Endorsements

B. Failure to Maintain

Parklet sponsors who fail to properly and sufficiently maintain the cleanliness, safety, and accessibility of their parklet may be subject to violations and fines. If maintenance issues are not resolved, the City may revoke the encroachment permit and parklet sponsors may be required by the City to remove the parklet at their own expense.

C. Utility Maintenance and Public Safety Emergencies

Because parklets may sit atop buried utilities, there may be instances where your parklet will need to be removed to access a utility beneath it. In the event of necessary utility maintenance or the unlikely event of a utility failure such as a gas leak or water main break that threatens public safety, the City or utility owner may remove parklets with little or no notice. Parklet sponsors are responsible for the cost of re-installing and restoring any damage to the parklet.

D. Parklet Removal

If for some reason the parklet sponsor decides no longer wants to maintain a parklet, the parklet sponsor is responsible for notifying the City and removing it at the parklet sponsors' own expense. Immediately upon removal the parklet area shall be cleaned and restored to its previous condition to the satisfaction of the City.

For More Information:

For questions or additional information regarding these Parklet Program Guidelines or the Parklet Encroachment Permit application, please contact:

Jennifer Chen, Economic Development Manager
jchen@cityofsanmateo.org
(650) 522-7009